Satisfy Professional's Needs

XGT

Makita® Cordless Belt Sander BS001G

XGT 40V max Li-ion

High power similar or superior to corded model

Optimal weight balance reduces unevenness in sanding



Belt size


76 x 533 mm

BL MOTOR AWS XPT

XGT 40Vmax Li-ion


Optimal weight balance

The battery is positioned above the sanding belt on the front side of the tool so that the sanding pressure can be evenly applied to the sanding surface.

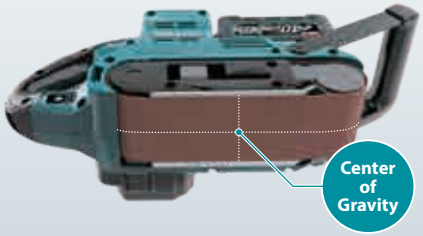


Angle adjustable front handle

Sanding to the edge of the wall is possible by fixing the front handle at 0 degrees vertically or 30 degrees to the rear.

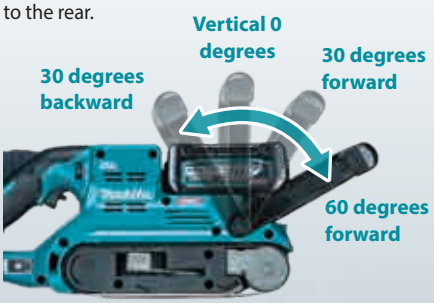

Stationary use (Installed upside down)

The tool has a flat surface on top of the housing, and it also can be used as a stationary belt sander by using the Clamp complete and Guide rule set (both of them are optional accessories).

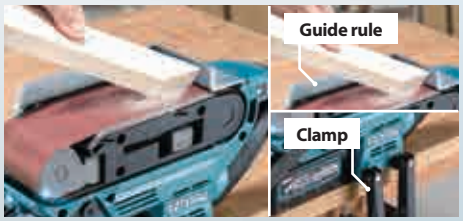

High power BL motor



Angle adjustable LED job light

- Twin LEDs with afterglow function
- Adjustable angle: 45 degrees



Lock-on / Lock-off function



eXtreme Protection Technology



AWS Auto-start Wireless System

Connects to compatible vacuum cleaners with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



Dust bag with anti-drop feature

We have adopted a new dust bag equipped with a lock mechanism. This keeps the dust bag from falling off due to its own weight when the tool is used vertically, such as when sanding walls.



Variable speed control by dial

Adjustable to five speeds according to the material or usage.



Flush sanding (Front, right side)

With the flat right side, it enables sanding along walls.



Accessories

Clamp complete

Part No. 192694-6



Guide rule set

Part No. 1915E3-1



Sanding shoe set

Part No. 193070-7



Carbon plate

Part No. 193197-3



Cork rubber plate

Part No. 193199-9



Charging Time

40Vmax Li-ion	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Belt Sander

BS001G

- Variable Speed
- Constant Speed
- Dust Collection
- Built-in Job Light
- Anti-restart function
- Carrying Case

Belt size	*76 x 533 mm (3 x 21")*
Belt speed	*120 - 470 m/min (390-1,540 ft/min)*
Vibration level (EN62841-2-4)	*Sanding metal plate: 2.5 m/s² or less*
Vibration K Factor (EN62841-2-4)	*Sanding metal plate: 1.5 m/s²*
Sound pressure level (EN62841-2-4)	*87 dB(A)*
Sound power level (EN62841-2-4)	*95 dB(A)*
Noise K factor (EN62841-2-4)	*3 dB(A)*
Dimensions (L x W x H)	*440 x 148 x 165 mm (17-1/4 x 5-7/8 x 6-1/2 ")*
Dimensions (Battery)	*BL4040*
Net weight	*4.5 - 5.1 kg (9.9 - 11.2 lbs.)*
Net weight (Battery)	*BL4020 - BL4050F*

Standard Equipment : Dust bag, Abrasive belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202409

www.makita.com