Satisfy Professional's Needs

XGT

Makita®

Cordless Driver Drill
Cordless Hammer Driver Drill

XGT 40V max Li-ion



Enhanced efficiency in heavy-duty tasks with three-speed modes

Work efficiency
increased by
about **2 times***
(Medium speed mode)

Cordless Driver Drill
DF003G
13 mm (1/2")

Cordless Hammer Driver Drill
HP003G
13 mm (1/2")

*SPAX screw driving (ø8 x 400 mm) into Douglas Fir
Compared to our previous model

BL MOTOR AFT XPT

XGT 40Vmax Li-ion

Medium speed mode for improved efficiency in heavy-duty tasks

Max. torque 180 N·m






SPAX screw driving (ø8 x 400 mm) into Douglas Fir
With BL4040F battery

HP/DF003G * Medium speed mode	**210**
Our previous model * Low speed mode	100

Slow — Drilling speed — Fast

High-speed rotation at 2,400 min^{-1}

Three-speed modes: Adjustable according to the task and material

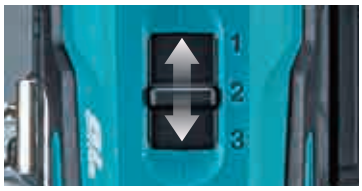

Smooth switching with a distinct click

Rotation speed (min^{-1})	
Low	0 - 650
Medium	0 - 1,800
High	0 - 2,400

AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.

Automatically stops



4-LED job light

Positioned below the grip for wide coverage



High brightness / Wide area

About 1-hour runtime in light mode

41 electronic clutch settings in low mode

For precise fastening in a variety of applications

Easy jog dial adjustment
with digital display



Soft start (in Low-speed mode)

SOFT START

Reduces kickback when starting with high-inertia bits

XPT High water-resistance

Charging Time

40Vmax Li-ion	Fast Charging DC40RA	DC40RC
BL4020 2.0Ah	**22** min	**30** min
BL4025 2.5Ah	**28** min	**38** min
BL4040 4.0Ah	**45** min	**67** min
*1**BL4040F** 4.0Ah	**45** min	**67** min
*1**BL4050F** 5.0Ah	**50** min	**85** min
BL4080F/H 8.0Ah	**76** min	**170** min

*1 Recommended battery

Cordless Driver Drill	DF003G
Cordless Hammer Driver Drill	HP003G

- Variable Speed
- Brake
- Reversing
- Mechanical 3-Speed
- Keyless Chuck
- Clutch-equipped
- Soft Start
- Built-in Job Light
- Carrying Case

*EN62841-2-1

Standard Equipment :
Depth gauge (HP003G), Belt clip, Screw, Hand strap, Bit, Bit holder, Grip assembly, Battery, Charger

	DF003G	HP003G
No load speed	*High: 0 - 2,400 min^{-1} / Med.: 0 - 1,800 min^{-1} / Low: 0 - 650 min^{-1}*	*High: 0 - 2,400 min^{-1} / Med.: 0 - 1,800 min^{-1} / Low: 0 - 650 min^{-1}*
Impacts per minute	-	*High: 0 - 36,000 min^{-1}*
	-	*Med.: 0 - 27,000 min^{-1} / Low: 0 - 9,750 min^{-1}*
Capacity	*Wood (Self-feed bit): 92 mm (3-5/8")*	*Wood (Self-feed bit): 92 mm (3-5/8")*
	Wood (Hole saw): 152 mm (6")	*Masonry: 20 mm (13/16")*
	Steel: 20 mm (13/16")	*Steel: 20 mm (13/16")*
Max fastening torque	*Max: 180 N·m (1,590 in.lbs.)*	*Max: 180 N·m (1,590 in.lbs.)*
	Hard: 150 N·m (1,330 in.lbs.)	*Hard: 150 N·m (1,330 in.lbs.)*
	Soft, High / Med. / Low:	*Soft, High / Med. / Low:*
	28 / 36 / 88 N·m (250 / 320 / 780 in.lbs.)	*28 / 36 / 88 N·m (250 / 320 / 780 in.lbs.)*
Clutch torque setting	*High / Med. / Low: 25 / 30 / 41*	*High / Med. / Low: 25 / 30 / 41*
Chuck capacity	*13 mm (1/2")*	*13 mm (1/2")*
Vibration level*	*Drilling into metal: 2.5 m/s^2 or less*	*Impact drilling into concrete: 6.8 m/s^2*
		Drilling into metal: 2.5 m/s^2 or less
Uncertainty (K) for Vibration*	*1.5 m/s^2*	*1.5 m/s^2*
Sound pressure level*	*81 dB(A)*	*88 dB(A)*
Sound power level*	*89 dB(A)*	*96 dB(A)*
Noise K factor*	*3 dB(A)*	*3 dB(A)*
Dimensions (L x W x H)	*196 x 86 x 284 mm (7-3/4 x 3-3/8 x 11-1/8")*	*197 x 86 x 284 mm (7-3/4 x 3-3/8 x 11-1/8")*
(Battery)	*BL4040F*	*BL4040F*
Net weight	*2.8 - 4.0 kg (6.2 - 8.8 lbs.)*	*2.8 - 4.0 kg (6.2 - 8.8 lbs.)*
(Battery)	*BL4020-BL4080F*	*BL4020-BL4080F*

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202510

www.makita.com